

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEJEW, A., mgr inż.

Managing methods in the mining industry. Przegl techn 86 no.14:5  
4 Ap '65.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

ZEWIERZEJEW, Aleksander, mgr inz.

Experiences in introduction and use of movable linings.  
Przegl techn 85 no. 42:1 18 0 '64.

ZEWIERZEJEW, Aleksander, mgr inz.

Scientific research institutes supporting the deep mining industry. Przegl techn 85 no.37:1, 3 13 S '64.

ZEWIERZEJEW, A.

Tape conveyer with a zipper. Wiadom gorn 11 no. 7/8:274 J1-Ag '60.

ZEWIERZEJEW, A.

ZEWIERZEJEW, A. Cost of geological surveys and their position in the calculation of prime cost of the exploitation of mining raw materials. p.523 Vol. 4 no. 11 Nov. 1956

Warszawa Poland

SOURCE: East European Accessions List (EEAL) Vol. 6, No. 4 April 1957

ZEWIERZEJEW, Aleksander

The International Mining Congress in Budapest; a useful exchange  
of opinions and experiences. Przegl techn no.48:10 30 N '60.

ZEWIERZEJEW, Aleksander

New Hungarian mining machinery. Wiadom gorn 12 no.1/2:  
29-30 Ja-F '61.

ZEWIERZEJEW, Aleksander

Future of the coal industry. Wiadom gorn 12 no.9:307-310  
S '61.

ZEWIERZEJEW, Aleksander, mgr inz.

Development trends of the coal mining industry. Przegl techn 85 no.4:  
4 26 Ja '64.

ZEWIERZEJEW, Alwksander, mgr inz.

Technological progress broadens the basis of raw materials for power production and engineering. Przegl techn 85 no.21:1,3 24 My '64.

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEW, Aleksander, mgr inz.

International symposium on mining coal and rocks. Przegl techn.  
84 no.46:10 17 N '63.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

ZEWIERZEJEW, Aleksander, mgr inz.

The first results of applying new technological methods in forming  
the coal mining industry. Przegl. techn. no.50:4,6 16 D '62.

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEJEW, Aleksander, mgr inz.

Work of the Central Designing Bureau of the Coal Industry of the U.S.S.R.  
Przegl techn 84 no.14:4 7 Ap '63.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEJEW, Aleksander, mgr inz.

Hydrotransportation of coal to great distances. Przegl techn  
[84] no.7:6 17 F '63.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEJEW, Aleksander, mgr inz.

Means and ways of reducing the production costs of underground  
coal mining in the U.S.S.R. Przegl techn no.33:4-5 18 Ag 1962.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

ZEWIERZEJEW, Aleksander, mgr.inz.

The reconstruction of the coal mines in the Donets Basin. Przegl  
techn no.49:3,4 7 D '60.

ZEWIERZEJEW, Aleksander, mgr.inz.

For speedy economic development in the mining industry. Przegl  
techn no.51:10 21 D '60.

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

ZEWIERZEJEW, A., mgr.inz.

Economic effectiveness of the application of hydraulic transportation  
of minerals. Przegl. techn. 81 no.14:19-20 Ap '60.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

ZEWIERZE EW, Aleksander, mgr inz.

Engineering geology in the national economy. Przegl techn 86  
no.9:13 28 F '65.

ZEWIERZEJEW, Aleksander, mgr inz.

Methods of inducing new mining devices. Przegl techn 86 no.8:9  
21 F '65.

ZEYBEL', YE. YA.

PA 244T25

USSR/Medicine - Dysentery

Mar 53

"Microbiological Characteristics of Dysentery-Cultures," I. I. Voinov, Ye. Ya. Zeybel', Sverdlovsk Inst of Epidemiol and Microbiol and the [Sverdlovsk] Rayon Sanitation-Bacteriol Lab

"Zhur Mikrobiol, Epidemiol, i Immunobiol" No 3, pp 20-21

The principal factor in the etiology of dysentery in 1951 was formed by bacilli of the Flexner W-type. 32% of the isolated strains were resistant to bacteriophage. Administration of even large quantities of sulfa-nilamide drugs did not result in any

244T25

significant lowering of the number of dysentery bacilli in the excrements.

244T25

ZEYBERLIKH, N.E.

Underground waters of the steppe zone between the Ust-Urt  
and Emba River. Biul. MOIP Otd. geol. 37 no.6:85-99 N-D '62.  
(MIRA 16:8)

ZEYBERLIKH, N.E.

Underground waters in the left bank of the middle Or' River. Trudy  
Inst. geol. i-geofiz. AN Kazakh. SSR 1:91-98 '63. (MIRA 16:7)  
(Or' River (Kazakhstan)--Water, Underground)

ZEYBERLIKH, N.E.

Maximum productivity of wells. Izv.AN Kazakh.SSR. Ser.geol.nauk  
no.1:107-112 '63. (MIRA 16:8)

1. Aktyubinskaya kompleksnaya geologorazvedochnaya ekspeditsiya  
Ministerstva geologii i okhrany nedr Kazakhskoy SSR.  
(Ilek Valley (Kazakhstan)--Wells)

ZEYBERLIKH, N.E.

Conditions governing the formation of the waters of alluvial  
sediments in the middle Uil Valley. Izv. AN Kazakh. SSR Ser.-  
geol. no.2:67-77 '62. (MIRA 15:6)  
(Uil Valley--Alluvium)

ZSYBERLIKH, N.E.

Formation of Mertvyy Kultuk. Izv.Vses.geog.ob-va 89 no.4:358-359  
Jl-Ag '57. (MIRA 10:10)  
(Mertvyy Kultuk (Caspian Sea))

ZEYBERLIKH, N.Ye.

Difference of Upper Cretaceous cross sections in the domes  
and interdome depressions of the Temir region. Biul. MOIP.  
Otd. geol. 40 no.2:88-92 Mr.-Ap '65.

(MIRA 18:5)

ZEYBIL, V. B.; KHOZINSKIY, V.I.; TSYPLIK, L.B.;; PANTELEYEV, N.S.; MAZUROVA, S.M.

"Utilization of a New Diploid Cell Strain Derived from Human Embryo Lung Tissue for the Cultivation of Enteroviruses and Measles-Virus."

Report presented at the Symposium on Biological Standardization, Opatija, Yugoslavia, 24-26 Sep 63.

*22 Feb 2001 N.L.*  
TATEVOSOV, K.G.; LIPKIN, L.N.; PETROV, V.A.; ZEYDA, N.I.; SLIZHIS, H.U.,  
nauchnyy redaktor; BORSHCHEVSKAYA, S.I., redaktor; RODCHENKO, H.I.,  
tekhnicheskiy redaktor

[Smoothly organized work in a machine manufacturing plant; collaboration of the V.M.Molotov Institute of Engineering and Economics in Leningrad with the "Pnevmatika" plant] Organizatsiya ritmicheskikh raboty mashinostroitel'nogo zavoda; iz opyta sодruzhestva Leningradskogo inzhenerno-ekonomicheskogo instituta imeni V.M.Molotova s zavodom "Pnevmatika" [Leningrad] Lenisdat, 1956. 175 p. (MLRA 10:7)  
(Efficiency, Industrial)

ZEYDAN, Selim.

Geothermal characteristics of the Tuymazy oil field. Geol.  
nefti i gaza 7 no.12:29-34 D '63. (MIRA 17:3)

I. Moskovskiy ordena Trudovogo Krasnogo Znameni institut  
neftekhimicheskoy i gazovoy promyshlennosti im. akad. Gubkina.

ANPILOGOV, A.P.; GALYAVICH, A.Sh.; ZEYDAN, Selim

Change in field-geophysical characteristics in the case of  
drilling in, and the development of producing beds. Trudy  
MINKHIGP no.50:252-259 '64 (MIRA 18:2)

ZEYDAN, Selim

Estimating the residual oil saturation of beds beyond the  
oil-potential boundary and its effect on the accuracy of  
the determination of porosity by the resistance method. Izv.  
vys. ucheb. zav.; neft' i gaz 8 no.2:11-13 '65.

(MTR 18:3)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti  
im. akademika I.M. Gubkina.

ZEYDAN, Seliun

Geophysical methods for the investigation of wells in the  
United Arab Republic as illustrated by the investigation of  
the Bakr oil field. Izv. vys. ucheb. zav.; neft' i gaz 6  
no.8:19-24 '63. (MIRA 17:6)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti  
imeni akademika I.M. Gubkina.

STAROSEL'SKIY, Aleksandr L'vovich; ZEYDE, B.B., red.

[Scheme for determining the order of the results of slide rule calculations] Skhema dlja opredelenija poriadka rezul'tata pri vychisleniakh na logarifmicheskoi lineike.  
Moskva, Izd-vo "Lesnaja promyshlennost", 1964. 8 p.  
(MIRA 18:4)

STAROSEL'SKIY, Aleksandr L'vovich; ZEYDE, B.B., red.


[Guide for slide rule computations by a combined method]  
Spravochnik dlja vychislenija na logarifmicheskoi lineike  
kombinirovannym metodom. Moskva, Lesnaja promyshlennost',  
1964. 20 p.  
(MIRA 17:11)

ZEYDE, L.I., inzh.

Erecting bridge supports on caissonless foundations. Avt. dor. 21  
no.5:7-8 My '58. (MIRA 11:6)  
(Bridges, Concrete)

ZEYDE,L.I., inzhener; VASIL'YEV,L.I., kandidat tekhnicheskikh nauk;  
SOKURENKO,Ye.A., inzhener

Deep foundations for bridge supports made of reinforced concrete  
envelope-piles. Transp.stroi.5 no.5:4-8 J1'55. (MLRA 8:12)  
(Bridges--Foundations and piers) (Piling (Civil engineering))

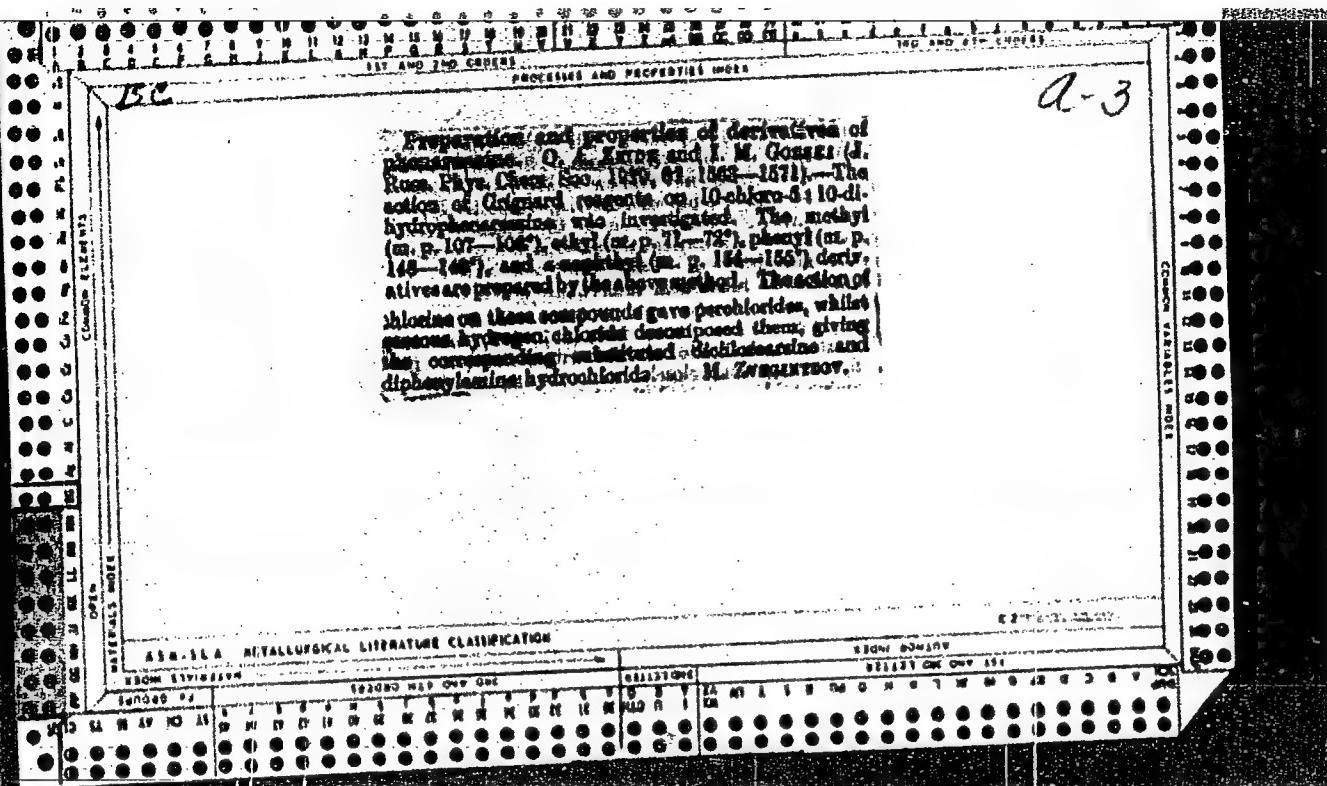

The structure of amber musk. I. Structure of methyl ether of pseudo-butyl-m-cresol and its products of nitration. O. A. Zalus AND R. M. DUNNIN. *J. Gen. Chem. (U. S. S. R.)* 2, 455-71 (1932).—Barbier (*C. A.* 22, 1330) formulated amber musk as 1,2,3,4,6-C<sub>11</sub>HMe(CMe)(OMe)(NO<sub>2</sub>)<sub>2</sub> (I), in which Cappeller (*C. A.* 22, 2030) and Ruzicka (*C. A.* 23, 2185) concurred. In the prep. of amber musk by nitration of the Me ether of butyl-m-cresol (II), B isolated 2 by-products: 1,3,2,4,6-C<sub>11</sub>HMe(OMe)(NO<sub>2</sub>)<sub>2</sub> (III), m. 92°, and a dinitrotertiary Me ether to which he ascribed the formula 1,3,2,4-C<sub>11</sub>HMe(OMe)(NO<sub>2</sub>)<sub>3</sub> (IV), m. 101°, both products being formed by displacement of the Me-C group by NO<sub>2</sub>. Cappeller showed that the product m. 101° is 1,3,4,6-C<sub>11</sub>HMe(OMe)(NO<sub>2</sub>)<sub>2</sub> (V) and not IV. According to the general rules of substitution in the C<sub>6</sub>H<sub>5</sub> ring, it is impossible to predict whether in the Friedel-Crafts synthesis of II the CMe group is placed in *m*-, *o*- or *p*-position to Me group of the nucleus. Z and D. have shown that by the action of *tert*-BuCl on *m*-Me-C<sub>6</sub>H<sub>4</sub>OMe (VI) with a little AlCl<sub>3</sub>, there is formed only 1,3,4-C<sub>11</sub>HMe(OMe)CMe<sub>2</sub> (VII). Moreover, by nitration of II was obtained a nitro compound, from which amber musk b.p. 183° while V b.p. 212-3°; this renders B's formula I of musk untenable and proves that the relative positions of the NO<sub>2</sub> groups in the amber musk and in V are different, and that the *tert*-Bu group in the musk and in II is in another position than 2. Of the other 3 theoretically possible configurations: 1,3,6-, 1,3,6- and 1,3,4-C<sub>11</sub>HMe(OMe)CMe<sub>2</sub> (VIII), the first 2 are excluded. II

Ch

Altax (dibenzothiophenyl disulfide) as an accelerator of rubber vulcanization. O-Zeide and K. Petrov. *J. Rubber Ind.* (U. S. S. R.) II, 401-6 (Dec., 1934); cf. *C. A.* 26, 84206; 29, 1007\*.—Dibenzothiophenyl disulfide (I) was prep. by treating an alk. soln. of mercaptothiophenolcarboxylic acid (II) with Cl<sub>2</sub> by the reaction:  $\text{II} + 2\text{Na}_2\text{CO}_3 + \text{Cl}_2 \rightarrow \text{I} + 2\text{NaCl} + 2\text{NaHCO}_3$ .  $\text{Na}_2\text{CO}_3$  (3.5 kg.), II (14 kg.) and water (30 l.) were heated at 95°-7° in a cast-iron steam-jacketed tank until dissolved (20-25 min.). The hot soln. was vacuum-filtered and washed, the filtrate was cooled to 0°,  $\text{PbCl}_2$  (300 cc.) was added to eliminate frothing, Cl<sub>2</sub> gas (1200-1300 cc., washed in  $\text{H}_2\text{SO}_4$ ) was bubbled through for about 1 hr. at 0° to 10°, the reaction product was centrifuged to wash free of Cl<sub>2</sub>, then centrifuged until it contained only 50% of water (10 kg.). It was then dried at 50°-60° for 3-4 days. The yield was 8% and the product contained 45% of I, which was easily removed with  $\text{Na}_2\text{CO}_3$  and might be treated with Cl<sub>2</sub> to yield more I. After the second treatment the loss was 30%. The final I product contained 0.3-0.5% water and 0.4-0.7% ash and m. 150-160°. The proportion of calcined  $\text{Na}_2\text{CO}_3$  used was 7% above the theoretical value. The corrosion loss of Fe in the reactor was 3 g. per sq. m. per hr. A. P.


30

## ASH-SEA METALLURGICAL LITERATURE CLASSIFICATION

83341 004178  
11113 T-600 004 181

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

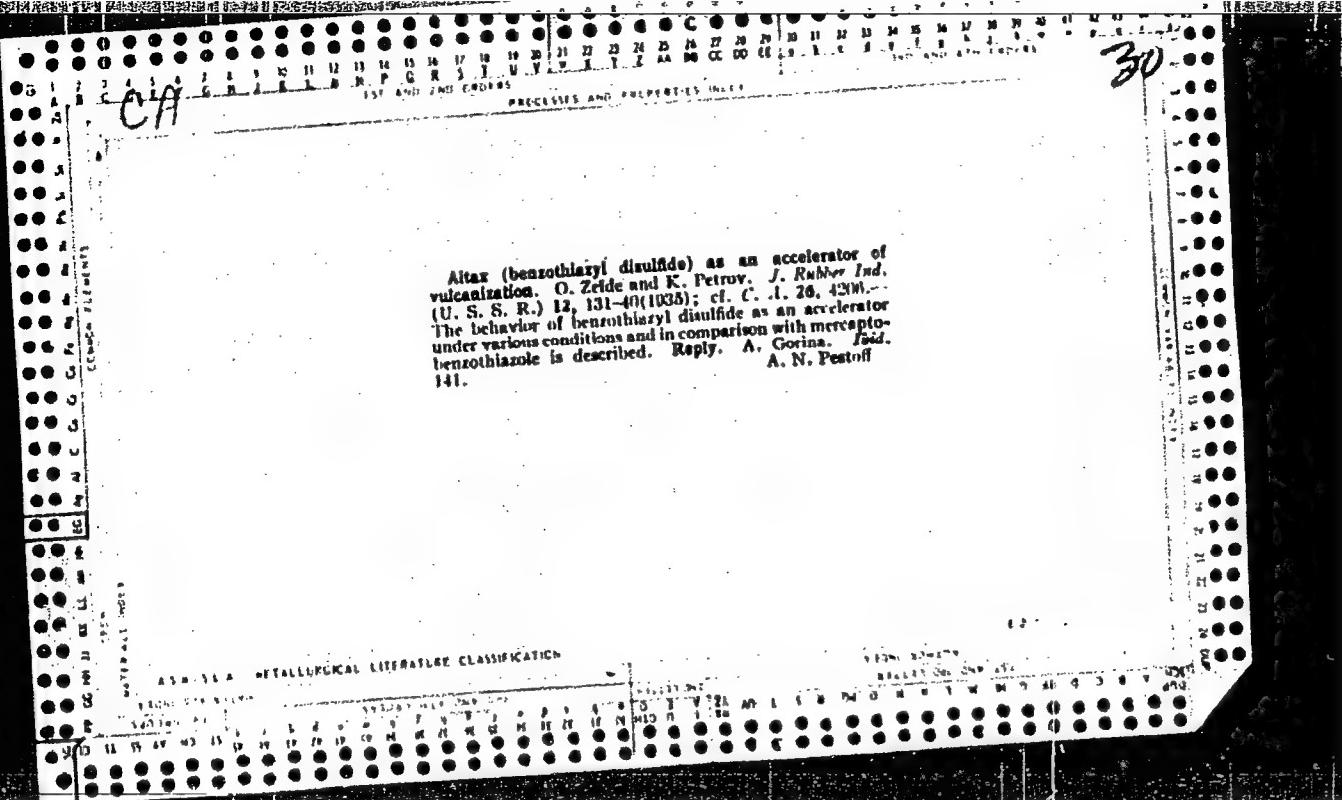


APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"



The preparation of accelerator "K-I" and its technological properties. O. Zelde and A. Galanov. *J. Rubber Ind.* (U. S. S. R.) 12, 1020-1103(1933).—K-I is a condensation product of 2 mols. of aniline with 3 mols. of AcII. A. Pestoff

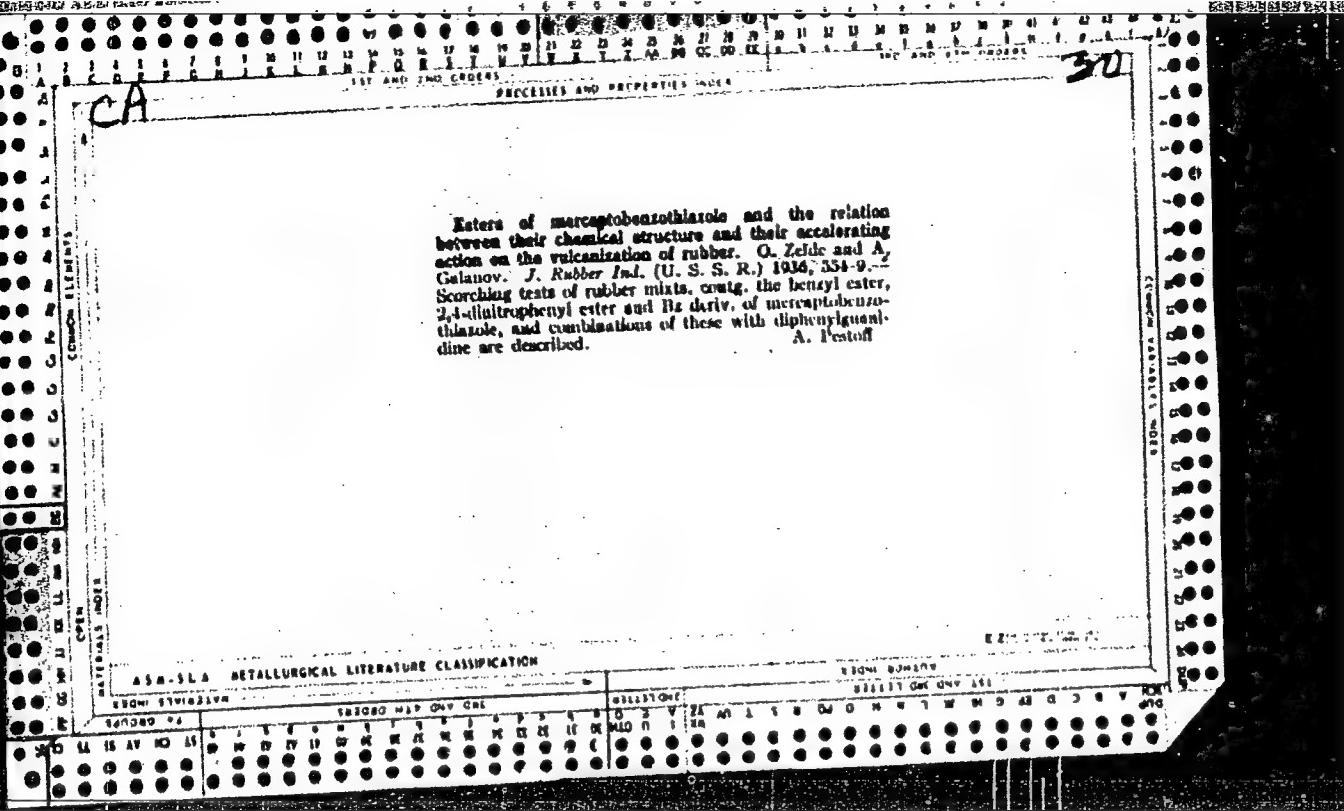


CA

30

Study of combined accelerators. Investigation of the accelerator Z-88. O. Zridc and A. Galanov. *J. Rubber Ind.* (U. S. S. R.) 1936, KB-2; cf. *C. A.* 30, 6082f.—A mixt. of mercaptobenzothiazole (1), hexamethylenetetramine (2) and stearic acid (3), was heated 2-2.5 hr. at 140-160°. The product softened at 40° and fused at 65-70°. The best results were had with 1% of Z-88 and 2.5% of S, based on the rubber. A. Pestoff

## ASH-SEA METALLURGICAL LITERATURE CLASSIFICATION

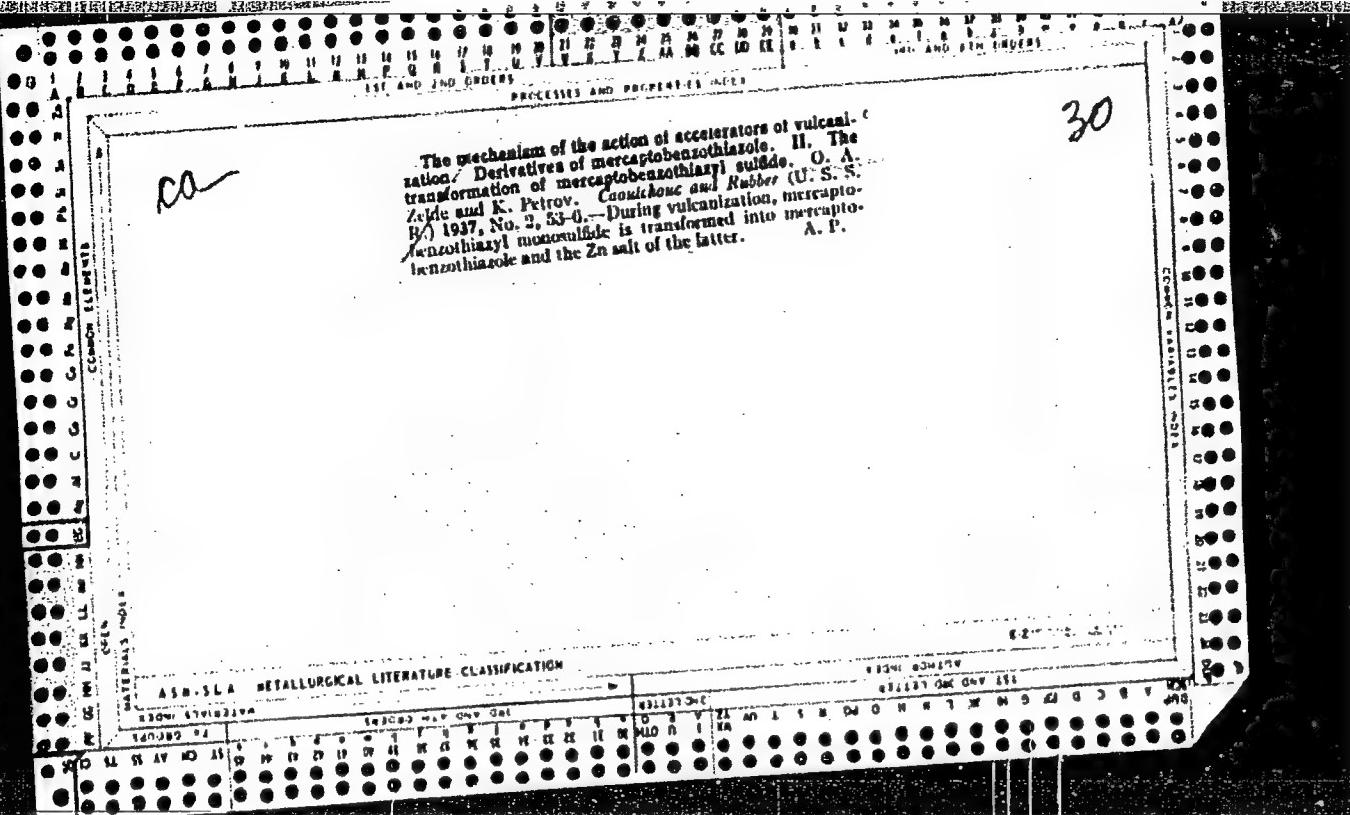

*Ces*

The action of chloroquidase on anthraquinic acid, O. A. Zelik and G. V. Chelintsev, *J. Gen. Chem. (U. S. S. R.)* 7, 2314-17 (1937).—If the product of this reaction is oxidized with alk. KMnO<sub>4</sub>, 2-aminopyridine-3-carboxylic acid is not formed, as Rath (*C. A.* 25, 3051) states. Instead, the product is 4-hydroxyquinazoline. The compd, which R. called the hydrazone of pyracridone, is actually the hydrazone of  $\alpha$ -pyridylanthraquinic acid, which is formed by action of alkali on the original reaction product. This substance is therefore 2,3-dihydrobenzoquinazol-4-one, as Z. originally stated (*C. A.* 19, 1282). H. M. Leicester

## AMERICAN METALLURGICAL LITERATURE CLASSIFICATION

10

The action of 2-chloroquinoline on anthranilic acid, **Benzooxazocoleone** (12-quinol[2,1b]quinazolin-12-one) and its reactions. O. A. Zetde and O. V. Cheliatsev. *J. Gen. Chem. (U. S. S. R.)* 7, 2318-23 (1937).—When 2-chloroquinoline and anthranilic acid are heated at 125-145°, benzooxazocoleone (I) m. 170°, and a small amt. of a dark yellow powder, m. 100°, are obtained. The HCl salt of I is easily hydrolysed. It forms a *picroate* m. 241°, a *chloroplatinate* which darkens at 275° and decomps. at 327°, a *chromate* which decomps. above 170°, and a methiodide, m. 122° (decomp.). When the latter is heated at 250° in a vacuum, it loses MeI and regenerates I. When I is heated with NaOEt in EtOH, the ring is opened and *N*-*quinalylanthranilic acid* (II), m. 200-7° (decompn.) is formed. This can be dehydrated to I by treatment with POCl<sub>3</sub>. When II is heated with PhI and Cu borax, it forms *N,N*-phenyl-*a*-*quinalylantranilic acid*, m. 221-2° (decompn.). Ring closure occurs when this compd. is heated with H<sub>2</sub>SO<sub>4</sub> and *N*-*quinalylocridane*, m. 270°, is formed. Oxidation of I with alk. KMnO<sub>4</sub> gives 3-phenyl-4-carbonyl-(3,4-dihydroquinazoline)-2'-carboxylic acid and 9,10-dicarbonyl-(indolenine-3')-1',2'-3,2-(3,4-dihydroquinazoline).

H. M. L.

## AIA-SLA METALLURGICAL LITERATURE CLASSIFICATION

140M 2140000 140M 2140000

ZEYDE, O.A.; SHERLIN, S.M.; BRUKER, A.B.

Interaction of n-halophenylhydrazines with arsenic acid. Zbir. ob.  
khim. 28 no.9:2404-2407 S '58. (MIRA 11:11)  
(Arsenic acid) (Hydrazine)

SOV/96-59-7-4/26

AUTHOR: Zeydel', K.G. (Engineer)

TITLE: Automatic Signalling Equipment to Indicate Exhaustion  
of H-cationite and Weak-base Anionite Filters in  
Demineralising-installations  
(Avtomaticheskiye signalizatory istoshcheniya H-kation-  
itovykh i slabosnovnykh anionitovykh fil'trov  
obessolivayushchikh ustav.vok)

PERIODICAL: Teploenergetika, 1959, Nr 7, pp 14-18 (USSR)

ABSTRACT: This article describes equipment that gives a signal when  
H-cationite and weak-base anionite filters are exhausted.  
The equipment permits considerable reduction of manual  
chemical control of water purification. The apparatus is  
based on comparison of the electrical conductivity of  
filtrates of ion-exchange filters contained in two iden-  
tical cells connected in an a.c. bridge circuit. The

Card 1/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite  
and Weak-base Anionite Filters in Demineralising installations

ionic conductivity of the hydrogen/<sup>ion</sup> is about seven times greater than that of the sodium ion. As an H-filter becomes exhausted, its working layer of material is gradually displaced downwards. At the instant of exhaustion, sodium ions commence to pass into the filtrate, so reducing the acidity and conductivity of the treated water. The reference cell contains correctly-treated water and so the resistance of both cells is approximately the same until the filter becomes exhausted. Formulae are given for calculation of the resistances of the bridge arms. It is shown that the magnitude of the signal is directly proportional to the amount of sodium ions passing through the filter and inversely proportional to the acidity of the H-cation-treated water. The device that signals exhaustion of the weak-base anionite filter is actuated by the increase in electrical conductivity of the filtrate that occurs when strong mineral acids commence to pass through as the anionite is exhausted. The general principle is the same as before but different

Card 2/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite and Weak-base Anionite Filters in Demineralising-installations

formulae are given for calculating the resistances of the bridge arms. A circuit diagram of the instrument is given in Figure 1 and its operation is explained. An electronic relay is connected across the bridge diagonal. The comparator cells are made of transparent plastic and contain stainless steel electrodes; the cell construction is illustrated in the cross-sectional drawing shown in Figure 2. There must be continuous flow of water through both cells whilst the instrument is operating. The reference cell may be supplied with water either from a portable ionite filter, as shown in Figure 3, or from a lower tapping in the main filter, as shown in Figure 4. Both methods have their advantages but the former can be used only when the main filters are allowed to operate until about 0.5 - 3 mg/litre of sodium ions are allowed

Card 3/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite  
and Weak-base Anionite Filters in Demineralising-installations

to leak through. If the H-filters are regenerated when the sodium ion content is 0.1 - 0.3 mg.equiv/litre, as in complete demineralisation of the water, the use of a portable filter is unsuitable because small temperature variations or changes in the salt content of the water may give false signals. In this case it is best to compare the conductivities of filtrates tapped at a certain height in the filter and from the bottom. This double-tapping method can also be used for signalling exhaustion of weak-base anionite filters; in this case the upper tapping may be located 50 mm above the bottom of the anionite. The instrument was tested at two power stations having filters 3 metres diameter charged with anionite grade AN-2F. At one station the anionite filters operated on the partial demineralisation system, so that there were appreciable quantities of sodium ion in the filtrate from the H-filters. The anionite filters were regenerated with soda ash. The properties of the water to be treated are tabulated. The test results are plotted in Figure 8 which gives a graph of the signal, as a function of the amount of acid passing

Card 4/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite  
and Weak-base Anionite Filters in Demineralising-installations

through. At the other power station the anionite filters operated on the total demineralisation system; the test results are plotted in Figure 6. In making tests on H-filters the questions studied were: the relationship between the signal and the amount of sodium-ion passing; the influence of the salt content of the raw water on the value of the signal caused by inclusion of sodium; and the dynamics of exhaustion of H-cationite along the height of the filter at the instant when sodium ions commenced to pass into the filtrate. This last point was studied in order to determine the best height for taking the sample for the reference cell. The tests were made on a large laboratory-type H-filter, 50 mm diameter, loaded with cationite to a height of 1 500 mm. The experimental procedure is described; the test results are plotted in

Card 5/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite  
and Weak-base Anionite Filters in Demineralising-installations

Figure 7 to show the relation between the value of the signal and the height of sampling with various salt concentrations in the raw water at the instant when sodium ions commenced to pass through the filter. It is concluded that when the H-filter is exhausted the magnitude of the signal corresponding to passage of sodium ions into the cell depends only on the height from which the sample is taken; it is practically independent of the salt content of the rawwater. If the sample is taken at a height of 350 mm from the bottom, the instrument gives a reliable signal of filter exhaustion when the sodium ion content reaches 0.2 - 0.3 mg.equiv/litre. The signalling equipment was also tested on full-scale H-filters which were passing 1.5 - 2 mg.equiv/litre sodium ions. The test results are given in Figure 8. Additional tests showed that 10% variation in supply voltage did not cause appreciable errors and a temperature difference on one cell of 2.6°C gave an error of 0.1 mg.equiv/litre. It is concluded that the signalling equipment is suitable for indicating exhaustion of H-cationite and weak-base anionite filters. The method of making two tappings in the filter

Card 6/7

SOV/96-59-7-4/26

Automatic Signalling Equipment to Indicate Exhaustion of H-cationite  
and Weak-base Anionite Filters in Demineralising-installations

is usually best. However, the portable filter method may be used if the H-filter is allowed to pass a considerable quantity of sodium ions and the salt content of the raw water is constant. The signalling device for weak-base anionite filters gives a reliable signal with free acid contents of 0 - 0.1 mg.equiv/litre when a portable absorber is used, as shown in Figure 3. The internal tapping method may also be applied in this case, but then the capacity of the absorbent is not fully used. There are 8 figures and 1 table.

ASSOCIATION: Vostochnyy filial VTI (Eastern Branch of the All-Union Thermo-Technical Institute)

Card 7/7


*ZEYDEL', K.G.*

AUTHORS:

TITLE:

PERIODICAL: Avtomatyka, no. 2, 1960, 76-80

TEXT: The authors propose a new principle for automatic lime regulation which they claim will guarantee an optimum liming regime with variable hardness of the water. The principle is based on the sensor. The theoretical bases of the regulator using a conductometric actions

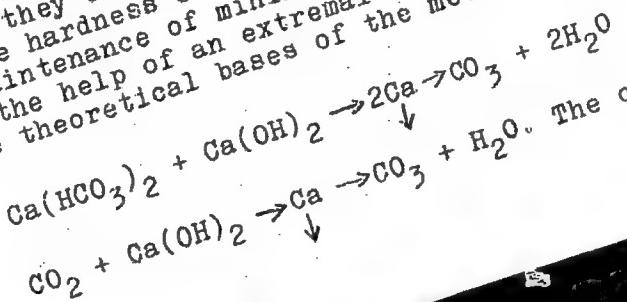

*card 1/2*

The use of an extremal ...

S/102/60/000/002/007/008/xx  
D251/D304

in direct proportion to the number of OH<sup>-</sup> and Ca<sup>++</sup> ions, hence minimum conductivity implies maximum precipitation. There are two basic schemes of regulation. In the first the extremal regulator is applied to the direct variation in the loss of lime. This scheme has certain faults which, the authors claim, are avoided in the combination-type scheme. This latter scheme is illustrated in a figure. The authors claim that with this combination-type apparatus a liming regime close to the optimum may be maintained. Engineer B.K. Svetal'skiy and Senior Mechanic V.V. Korochins'kiy participated in work on the regulator. There are 4 figures.

SUMMARY: January 25, 1963

Card 2/2

ZEYDEL!, K.G., inzh.

Device for controlling and registering the ammonia content in  
steam and feed-water condensate. Energetik 9 no.9:33-36 S '61.  
(MIRA 14:9)

(Feed water) (Ammonia)

ZEYDEL, K.G., inzh.

pH value of saltless water. Elek.sta. 29 no.8:81-82 Ag 758.  
(MIRA 11:11)  
(Feed water) (Hydrogen-ion concentration)

ZEYDEL', K.G., inzh.

Automatic control of the dosing of a coagulant by means of electric conductivity impulses. Energetik 12 no.5:17-18 My '64.  
(MIRA 17:6)

ZEYDEL'MAN, F.R.; OGIEZNEV, A.K.

Change in the chemical characteristics of turf-Podzolic soils  
due to gleying. Pochvovedenie no.5:1-12 My '65. (MIRA 18:5)

1. Respublikanskiy gosudarstvennyy institut po proyektirovaniyu  
vodokhozyaystvennogo i meliorativnogo stroitel'stva RSFSR,

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2


SEIDENFELD, B. S. Cand. Tech. Sci.

Dissertation: "Development of Quantitative Methods for Determination of Sulfite-Cellulose Liquors and Gelatin in Copper Electrolytic Baths." Moscow Inst of Fine Chemical Technology imeni M. V. Lomonosov, 13 Oct 47.

SO: Vechernaya Moskva, Oct, 1947 (Project #17836)

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

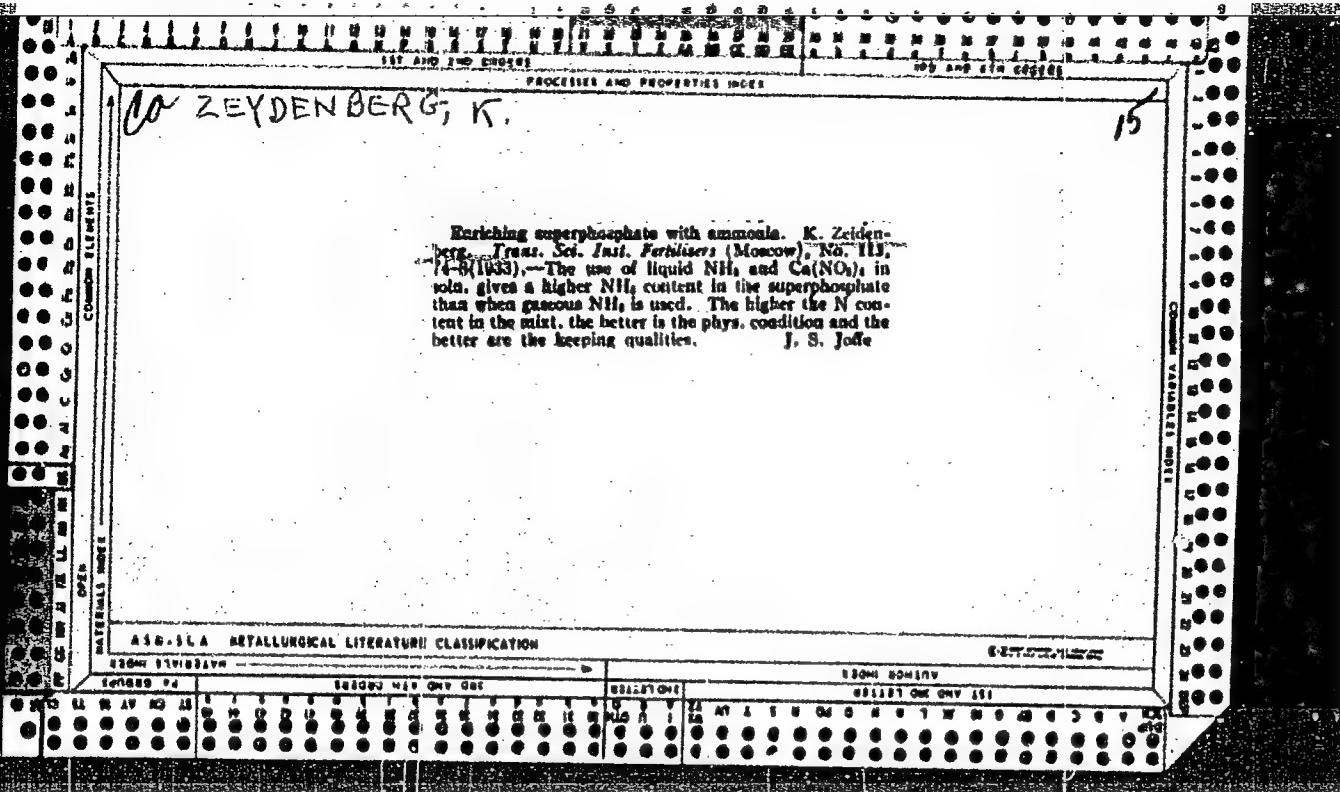

APPROVED FOR RELEASE: 09/19/2001


CIA-RDP86-00513R001964510012-2"

ZIEYDENBERG, K.

Obtaining lime-ammonium nitrate. K. Zeldenberg-Traen. Sci. Inst. Fertilizers (Moscow), No. 113, 78-9 (1933).—By adding finely divided lime to fused  $\text{NH}_4\text{NO}_3$  ( $at 135^\circ$ ) the lime-ammonium nitrate is obtained. Z. made such a mixt. by using  $\text{CO}_2$  and liquid  $\text{NH}_3$ , in which  $\text{Ca}(\text{NO}_3)_2 \cdot 4\text{H}_2\text{O}$  was dissolved according to the following equation:  $\text{Ca}(\text{NO}_3)_2 \cdot 4\text{H}_2\text{O} + \text{CO}_2 + 2\text{NH}_3 = \text{CaCO}_3 + 2\text{NH}_4\text{NO}_3 + 3\text{H}_2\text{O}$ . A product is obtained contg. 20% N and 40%  $\text{CaCO}_3$ . I. S. Inde.

J. G. Taff

15

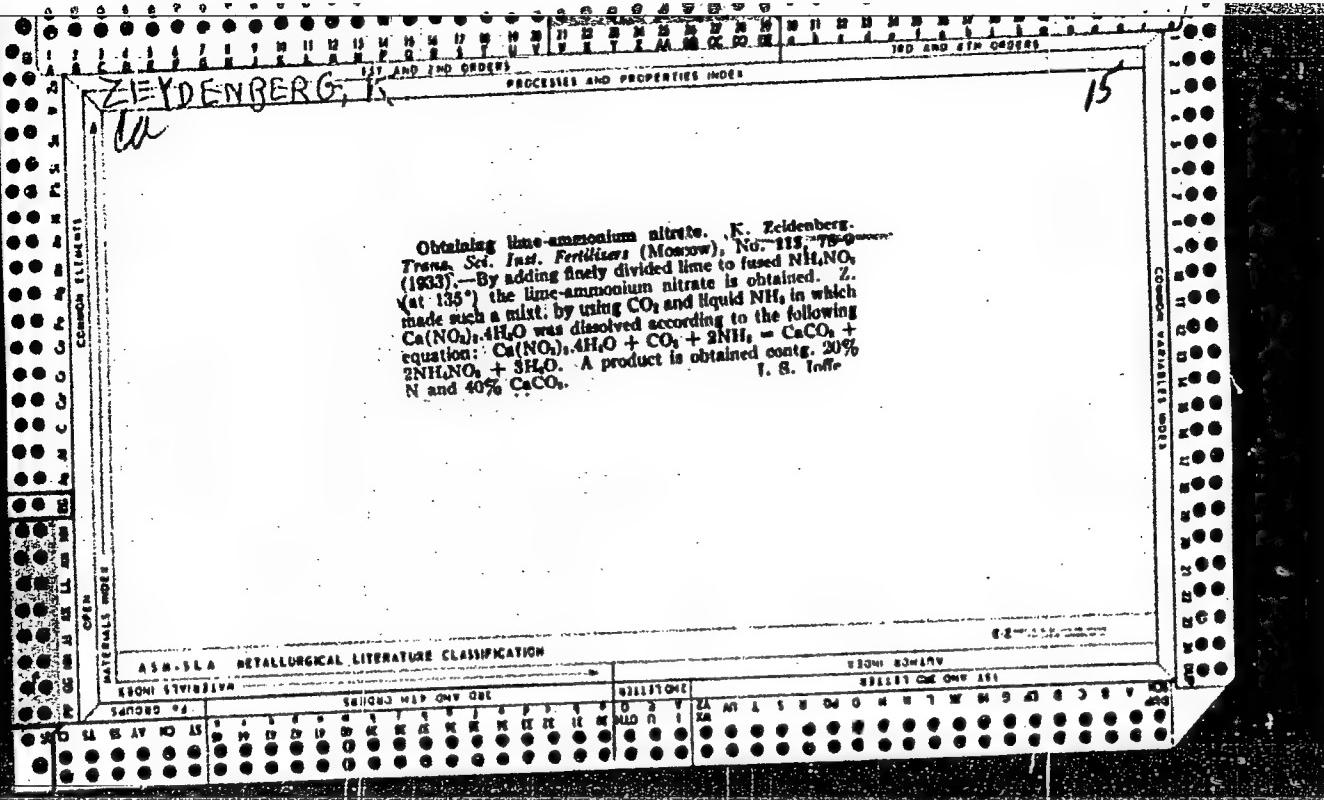

ZEYDENBERG, V.K.; LEBEDEV, S.A., red.

[English-Russian dictionary on computing technique] Anglo-  
russkii slovar' po vychislitel'noi tekhnike. Moskva:  
Sovetskaisa entsiklopediia, 1964. 279 p. (MIRA 17:10)

ZEYDENBERG, V. K., Engineer  
LANDER, E. P., Engineer  
SENATOROV, YU. I., Engineer  
ZIMAREV, A. N., Engineer

"Arithmetic Unit for Automatic Parallel Operation Computing Machine Employing Germanium Point Contact Instruments" a paper presented at the Conference on Methods of Development of Soviet Mathematical Machine-Building and Instrument-Building, 12-17 March 1956.

Translation No. 596, 8 Oct 56

ZEYDRNBERG, V.K.; ZIMAREV, A.N.; LANDER, Ye.P.; SENATOROV, Yu.I.

[Parallel-type arithmetical system using semiconductor devices] Arifmeticheskoe ustroistvo parallel'nogo tipa na poluprovodnikovykh priborakh. Moskva, In-t technoi mekhaniki i vychislitel'noi tekhn. Akad.nauk SSSR, 1957. 27 p.

(Transistor circuits) (Electronic calculating machines) (MIRA 12:10)

ZEYDENBERG, V

K

Anglo-Russkiy Slovar' po Vychislitel'noy Tekhnike, (By) V.K. Zeydenberg I T.S. Loseva.  
Moskva, 1958-

v.  
At Head of Title: Akademiya Nauk SSSR. Institut Tochnoy Mekhaniki i Vychislitel'noy  
Tekhniki.

SMIRNOV, Gennadiy Dmitrievich; ZEYDENBERG, V.K., red.; LARIONOV, G.Ye.,  
tekhn.red.

[Electronic calculating machines] Elektronnye tsifrovye mashiny.  
Moskva, Gos.energ.izd-vo, 1958. 87 p. (Massovaia radiobiblioteka,  
no.315) (MIRA 12:3)

(Electronic calculating machines)

ZEYDENBERG, V.K.; LOSEVA, T.S.; KOBELEV, V.V., inzh., ratsenzent

[English-Russian dictionary on computers] Anglo-russkii slovar'  
po vychislitel'noi tekhnike. Moskva, In-t tochnoi mekhaniki i  
vychislitel'noi tekhniki Akad.nauk SSSR. No.1, 1958. 93 p.

(Electronic calculating machines--Dictionaries)  
(English language--Dictionaries--Russian) (MIRA 13:12)

BEZRUKAVNOVA, L.I., kand.ekonom.nauk, red.; ZSYDER, N.B., prof., red.;  
LOPATKINA, V.S., dotsent, red.; TSIPKIN, A.L., prof., red.

[Problems in the development of collective farming at the present  
stage] Nekotorye voprosy razvitiia kolkhoznogo stroia na sovremennom etape; sbornik statei. Saratov, 1960. 166 p.

1. Saratov, Yuridicheskiy institut.  
(Collective farms)

(MIRA 14:4)

ZEYDER, NIKOLAY BORISOVICH

ZEYDER, Nikolay Borisovich (Saratov Juridical Inst), Academic degree of Doctor of Juridical Sciences, based on his defense, 4 July 1955, in the Council of the All-Union Inst of Juridical Sciences, of his dissertation entitled: "Court decisions in Soviet Civil Law."

For the Academic Degree of Doctor of Sciences.

Byulleten' Ministerstva Vysshego Obrazovaniya SSSR, List No.8, 14 April 1955.  
Decision of Higher Certification Commission Concerning Academic Degrees and Titles.

JPRS 512

ZEYDNER, II

U.S.S.R.

The nature of the formation of White Star Trading Co. and its connection with the state of Argentina.

Chemical Abstracts  
Vol. 48 No. 5  
Mar. 10, 1954  
Synthetic Resins and Plastics

Kinetics of the formation of polyester resins. VI. Kinetics of the reaction of polyesters formed from ethylene glycol and phthalic acid. D. S. Sankaran and I. Zeldler (Vacquer Plant, Chelyabinsk); Zav. Prikla. Khim. 26, 1205-12 (1953); cf. ibid. 410; C.A. 47, 11918c. The polyesterification of acid esters of ethylene glycol and phthalic acid is a bimol. reaction. The rate constant at 150° is 0.00294, at 100° 0.00184, and at 170° 0.00784. Activation energy is 17,800 cal./mole. The rate constants vary with different proportions of reagents (above values are given for equimolar mixts.). Along with polyesterification, there proceeds a competing formation of simple esters. As the amt. of glycol in the mixt. is reduced, the conditions improve for reversal of the polyesterification reaction, which leads to increasing amts. of phthalic anhydride in the mixt.

G. M. Kosolapoff

1-27-64

SHKOL'MAN, Ye.Ye.; ZEYDLER, I.I.

Kinetics of the reaction of polyetherification of acidic esters of glycerin  
and phthalic acid. Zhur.prikl.khim. 26 no.7:736-742 JI '53. (MLRA 6:7)

1. Tsentral'naya laboratoriya Chelyabinskogo lakokrastechnogo zavoda.  
(Etherification) (Glycerin) (Phthalic acid)

ZEYDLER, I.I.; SHKOL'MAN, M.E.

Kinetics of the reaction of polyesterification of di-ethers of glycerin and phthalic acid. Zhur.prikl.khim. 26 no.8:840-847 Ag '53. (MLRn 6:8)

1. TSentral'naya laboratoriya Cuelyabinskogo lakovrasochnogo zavoda.  
(CA 47 no.22:11918 '53) (Esterification) (Ethers)

3

ZEYDLER, I.I.

Mechanism of alcoholysis of vegetable oils. E. N. Shkol'nikov, I. I. Zeydler, and N. M. Voroshilova (Lacquer and Paint Plant, Chelyabinsk). Zhur. Prilich. Khim. 28, 1190-S(1955).—Glycerolysis of linseed and cottonseed oils and of tallow was examined, both in open vessels and under inert atm. The normal glycerolysis process is complicated by side reactions which decrease the yield of monoglycerides and lower its HO no. These reactions are aided by high temp., time, the use of lightly polymerized oils, and losses of free glycerol. The main side reactions are: reversal of glycerolysis and formation of polyglycerols. Glycerolysis should be conducted in an app. with a reflux condenser to eliminate the loss of glycerol which aids the reversal of glycerolysis. Any means designed to lower the operating temp. and reduce the duration of reaction serve to improve the yield of monoglycerides. A long reaction time also aids polymerization of the oils. G. M. Kosolapoff

(2)

ZEYDLER, I. I.

5  
0  
9

Molecular weight as a function of the degree of polymerization. I. I. Zeydler [Polytech. Inst., Chelyabinsk]. *Zhur. Fizikal. Khim.* 29, 52-59 (1955); cf. *C.A.* 45, 10087. No. 1

Differential equations, based on the kinetics of 2nd-order polycondensation processes are developed. On integration they are:  $y = b - (mb - s)^{1/n}v^{1/n}$  and  $x = a - (mb - s)^{1/n}v^{1/n}$ , where  $m$  and  $n$  are the no. of functional groups in the acid  $b$  and the alc.  $a$ ;  $s$  is the no. of functional groups condensed;  $s$  is detd. by a mass balance after titration of the remaining acid groups in the filtrate. This relation applies to processes the reactants of which contain only one type of functional groups: COOH, NH<sub>2</sub>, or OH. The no. of links in the polycarbonate,  $f$ , each link corresponding to a mol. of acid or alc., is given as  $f = l/(s - x)$ , where  $v = x + y$  and  $l$  is the no. of bonds. For the reaction between adipic acid and glycerol (cf. Radikov and Korshak, *C.A.* 43, 4547c)  $m = n = 2$ ,  $y = (2 - x)^{1/4}$  and  $l - x = (2 - x)^{1/4}$  and  $f = (4 - s)/(2 - x)$ . For mixts. of  $mb/mn > 1$ ,  $x = s/m$ , and when  $mb/mn < 1$ :  $x = s/m$ , where  $v$  is the degree of the completion of the reaction. The calcd. values agree with those obtained by expt. By means of these relations it is possible to det. the type of the polyester obtained in the presence of an excess of one of the reactants at any stage of the reaction. I. B.

M. A. YOUTZ  
2ccp:cs

EXCERPTA MEDICA Sec 12 Vol 13/6 Ophthalmology June 59

937. TREATMENT OF ANGIOMAS OF THE ORBIT - Przyczynek do leczenia  
naczyniaków oczodołu - Zeydler L. Klin. Chor. Oczu A. M., Łódź -

KLIN. OCZNA 1958, 26/2 (203-208) Illus. 3  
Two cases are described. The treatment with X- or Ra-rays is superior to surgical intervention, and gives better results. Szmyt - Warsaw (XII, 5, 16, 18)

SOBAN'SKI, Ya. [Sobanski, J.]; SHOSLAND, V. [Szosland, W.]; ZEYDLER, I.  
[Zejdler, I.]; ZHELAWSKA-RYBUS, Ye. [Zelawska-Rybus, E.]

Causes of the development of astereoscopy, its clinical symptoms  
and treatment. Uch.zap. GNII glaz.bol. no.7:203-207 '62.

(MIRA 16:5)

1. Iz kliniki glaznykh bolezney (rukovoditel' - prof. Ya. Soban'ski)  
Meditinskoy akademii v Lodzi, Pol'skaya Narodnaya Respublika.  
(STRABISMUS)

ZEYDLER, Leopold

The treatment of angiomas of the orbit. Klin. oczna 28 no.2:203-208  
1958.

1. Z Kliniki Chorob Oczu A.M. w Łodzi. Kierownik: prof. dr med.  
J. Sobanski. Adres: Łódź, ul. Kopcińskiego 22, Klinika Chorob Oczu A.M.  
(ORBIT, neoplasms,  
angioma, x-ray ther. (Pol))  
(RADIOTHERAPY, in various diseases  
angioma of orbit, results (Pol))  
(ANGIOMA,  
orbit, x-ray ther. & results (Pol))

SOBANSKI, J.; ZEYDLER, L.

Effect of physiological sleep on the intraocular pressure in latent glaucoma. Klin. oczna 28 no.3:323-331 1958.

l. Z Kliniki Chorob Oczu A.M. w Lodzi Kierownik: prof. dr med. J. Sobanski. Adres autora: Lodz, ul. Narutowicza 119.

(GLAUCOMA, physiol.

eff. of sleep on intraocular pressure in latent glaucoma  
(Pol))

(SLEEP, eff.

on intraocular pressure in latent glaucoma (Pol))

SOBANSKI, Janusz, prof. dr. med.; ZEYDLER-GRZEDZIELEWSKA, Lucyna;  
GOETZ, Jerzy

On the treatment of intraocular malignant melanomas. Klin.  
oczna 35 no.2:367-371 '65.

1. z Kliniki Chorob Oczu Akademii Medycznej w Łodzi (Kie-  
rownik: prof. dr. med. J. Sobanski).

ZEYDIER-ZBOROWSKI, Jan, mgr inz.

Evaluation of the needs of street and road lighting in cities  
and suburban settlements. Wiad elektrotechn 30 no.9:307-309  
S '62.

1. Energoprojekt, Poznan.

ZEYDLER-ZBOROWSKI, Jan, mgr. inz.

Road lighting problems in cities and suburban settlements.  
Wiad elektrotechn 30 no.8:264-266 Ag '62.

1. Energoprojekt, Poznan.

MALOV, Vladimir Sergeyevich; MESHKOV, Vadim Konstantinovich; ZEYDLIIZON,  
I.M., redaktor; SKVORTSOV, I.M., tekhnicheskij redaktor.

[The control rooms of electric power systems] Dispetcherskie  
punkty energeticheskikh sistem. Moskva, Gos. energeticheskoe  
izd-vo, 1955. 271 p.  
(MIRA 8:3)  
(Electric power distribution)

VEKSLER, V.I.; YEFREMOM, D.V.; MINTS, A.L.; VEYSBEYM, M.M.; VODOP'YANOV,  
P.A.; GASHEV, M.A.; ZEIDLITS, A.I.; IVANOV, P.P.; KOLOKEMSKIY,  
A.A.; KOMAR, Ye.G.; MALTSEV, I.F.; MOHOSZON, M.A.; NEVYAZHSKIY,  
I.Kh.; PETUKHOV, V.A.; BABINOVICH, M.S.; GUBCHINSKIY, S.M.; SH-  
MEL'NIKOV, X.D.; STOLOV, A.M.

Ten Bev. energy synchrocyclotron built by the Academy of Sciences  
of the U.S.S.R. Atomp.energ. no.4:22-30 '56. (MLB 9:12)  
(Cyclotron)

Card 1/2

S 15286-65

ACCESSION NR: AP5001250

With a decrease in boron content, the level of internal

stress in the material increases and the strength decreases.

100% 100% 100%

Car 1 112

BOLGOV, I.S.; AZHAZHA, V.M.; AMONENKO, V.M.; ZEYDLITS, M.P.

Revealing etch figures in nickel by thermal etching in  
vacuum. Fiz. met. i metalloved. 18 no.4:553-557 O '64. (MIRA 18:4)

1. Khar'kovskiy fiziko-tehnicheskiy institut.

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2

WAJS, K.; ZEYDLER-ZBOROWSKI, Jan, mgr inz.; LADZINSKI, Radoslaw, doc. dr

Review of technical publications. Przegl elektrotechn 40 no.12:  
517-518 D '64.

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R001964510012-2"

L 31869-66 EWP(k)/EWT(d)/EWT(m)/EWP(h)/T/EWP(l)/EWP(e)/EWP(w)/EWP(v)/EWP(t)  
ACC NR: AT6013552 ETI IJP(c) (N) JD/BW/GD SOURCE CODE: UR/0000/65/000/000/0063/0068  
AUTHOR: Amonenko, V. M.; Azhazha, V. M.; Bolgov, I. S.; Zeydlits, M. P.; Ivanov, V.  
Ye.; Shapoval, B. I.

ORG: Physico-Technical Institute, AN UkrSSR (Fiziko-tehnicheskiy institut AN UkrSSR)

TITLE: Influence of boron on the properties of nickel ✓ 66  
64  
B+/  
SOURCE: AN UkrSSR. Institut problem materialovedeniya. Vysokotemperaturnyye neorgan-  
cheskiye soyedineniya (High temperature inorganic compounds). Kiev, Naukova dumka, 1965,  
63-68

TOPIC TAGS: boron, nickel, alloy, boron alloy, internal friction

ABSTRACT: The effect of boron concentration (0-0.1 wt %) on mechanical strength limit,  
relative elongation, and relative plasticity of nickel was examined at 25° and 600°C  
and also the temperature dependence of internal friction ( $\eta^{-1}$ ) for nickel containing  
0.005-0.1% B was examined in the 20°-60°C range. Samples of nickel-boron alloys were  
prepared by fusing mixtures of H-0-grade nickel and NiB standard material in an elec-  
trical furnace. After 70-80% deformation for 4 hour at 400°C, the samples were held  
for 2 hours at 800°C. In general, boron had a beneficial effect on the mechanical pro-  
perties of nickel. Specifically, boron was found to strengthen the alloy crystals and  
the intergrain boundaries within the alloy, to improve the internal grain structure and

Card 1/3

L 31869-66  
ACC NR: AT6013552

to retard harmful recrystallization processes. The effect of boron on strength limit, relative elongation, and relative plasticity of nickel is shown in figure 1.

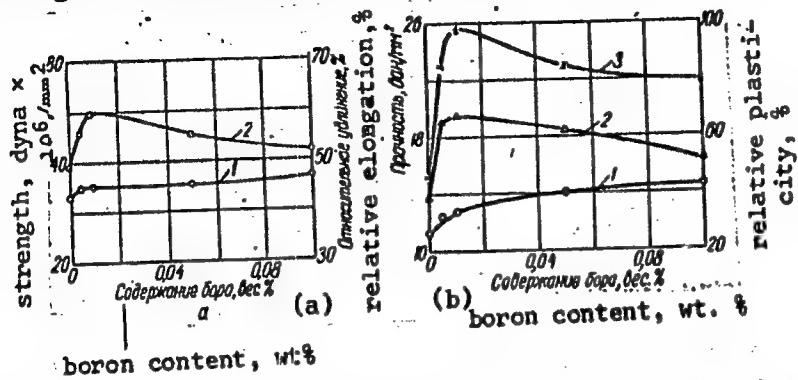


Fig. 1. The effect of boron on strength limit (1), relative elongation (2), and relative plasticity (3) of nickel at 25°C (a) and 600°C (b).

The temperature dependence of internal friction ( $Q^{-1}$ ) of Ni-B alloys is given in figure 2. Orig. art. has: 5 figures.

Card 2/3

I 31869-66

ACC NR: AT6013552

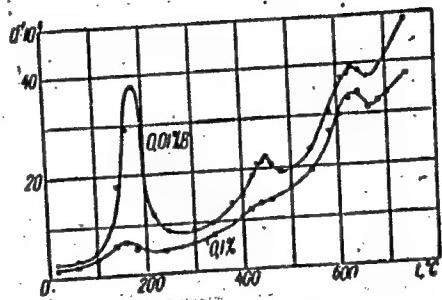
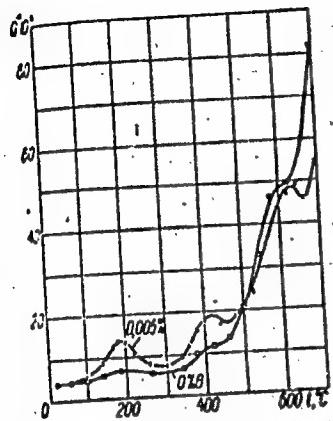


Fig. 2.

UB CODE: 11/

SUBM DATE: 03Jul65/

ORIG REF: 012/

OTH REF: 001

Card 3/3 JS

L 31870-66 EWP(k)/EWT(m)/T/EWP(e)/EWP(w)/EWP(t)/ET† IJP(c) JD/GD  
ACC NR: AT6013553 (N) SOURCE CODE: UR/0000/65/000/000/0069/0075

AUTHOR: Azhazha, V. M.; Amonenko, V. M.; Bolgov, I. S.; Zeydlits, M. P.; Ivanov, V. Ye.

ORG: Physico-Technical Institute AN UkrSSR (Fiziko-tehnicheskiy institut AN UkrSSR)

TITLE: Smelting in vacuo as a means of improving the mechanical properties of boron steels

SOURCE: AN UkrSSR. Institut problem materialovedeniya. Vysokotemperaturnyye neorganicheskiye soyedineniya (High temperature inorganic compounds). Kiev, Naukova dumka, 1965, 69-75

TOPIC TAGS: boron steel, mechanical property, steel, ferrous metal, steel microstructure, chromium steel, nickel steel / EI437A steel, EI437B steel, EI403 steel

ABSTRACT: The effect of smelting (250°-1000°C) in vacuo and in air for 137-1300 hrs on relative elongation, impact strength, and hardness of chromium-nickel steels containing from 0.4 to 3.0 wt % boron was investigated. EI437A (boron-free), EI437B (0.015 wt % B), EI403 (0.1-1.0 wt % B), and some specially prepared steels containing 2-3 wt % B were used as representative steel samples. It was found that the smelting of steels containing 2-3 wt % B results in a 1.5-2 fold increase in their plasticity. A 15-20% improvement in relative elongation characteristic and two-fold increase in impact strength result when high purity steel grades are smelted in vacuo. Greater improve-

Card 1/2

L 31870-66

ACC NR: AT6013553

ments in mechanical properties of boron-containing steels were achieved by smelting in vacuo rather than in air. The effect of smelting in vacuo on strength and plasticity of EI437B steel on rapid breaking strength and relative elongation of EI437B is graphed. The effect of boron content on mechanical properties of EI403 steel is also graphed. Orig. art. has: 6 figures, 4 tables.

SUB CODE: 11,13 SUBM DATE: 03Jul65/ ORIG REF: 006/ OTH REF: 004

Card 2/2

ZEYDLITS, P.M., FAINBERG, YA. B., SINELNIKOV, K.D. (U.S.S.R.)

Modifications of the Linear and cyclical methods.  
of acceleration

CERN-Symposium on High Energy Accelerators and Pion  
Physics

Geneva 11-23 June 56  
In Branch #5

ZEYDLITS, P. M.

PHASE I BOOK EXPLOITATION  
Akademiya nauk Ukrainskoy SSR. Sessiya po mirnomu ispol'zovaniyu atomnoy energii  
Trudy (Transactions of the Session on Peaceful Uses of Atomic Energy), Kiev,  
Izd-vo AN Ukrainskoy SSR, 1958. 188 p. Sov/4012

Resp. Ed.: M. V. Pasechnik, Doctor of Physics and Mathematics; Editorial Board:  
A. K. Val'ter, Academician, Academy of Sciences Ukrainskaya SSR, O.F. Nemets,  
Candidate of Physics and Mathematics, Ed. of Publishing House: T. K. Remennik, Doctor of Physics and  
Mathematics; Ed. of Publishing House: M. V. Pasechnik, Doctor of Physics and  
N. P. Rakhlina.

PURPOSE: This collection of articles is intended for physicists and scientific personnel working in nuclear research.

Card 1/6

COVERAGE: The articles in this collection discuss linear proton accelerators, electron accelerators, electrostatic accelerators, magnetron lenses, the interaction of charged particles and neutrons with nuclei, the applications of tagged atoms in physics research, and experimental methods. Some of the articles are descriptions of already existing nuclear installations and experimental apparatus. No personalities are mentioned. There is a bibliography of Soviet and non-Soviet sources at the end of most of the articles.

## Transactions of the Session (Cont.)

SOV/4012

## TABLE OF CONTENTS:

## SECTION I. ACCELERATORS

Sinel'nikov, K.D., P.M. Zeydlits, A.M. Nekrashevich, L.I. Bolotin, Ya. S. Shutskever, B.S. Akshanov, N. Ye. Kovnak, K.A. Leontovich, A.I. Akhiyezer, I.M. Lifshits, Ya. B. Faynberg, L.N. Rozentzveyg (Deceased), G. Ya. Lyubarskiy, M.I. Kaganov, and L.E. Pargamanik. 20.5-Mev Linsar Proton Accelerators	5
Sinel'nikov, K.D., P.M. Zeydlits, I.A. Grishayev, L. Kh. Kitayevskiy, A.I. Akhiyezer, Ya. B. Faynberg, N.P. Selivanov, and N. A. Khizhnyak. Electron Accelerator with an Output Energy of 3.5 Mev	16
Val'ter, A.K., and A.A. Taygikalo. A 4-Mev Electrostatic Accelerator for Precision Nuclear Measurements	24
Akshanov, B.S., and P.I. Strel'nikov. A 2.5-Mev Horizontal-Type Electrostatic Generator	35
Kryshtab, G.S. Electrostatic Accelerator in Compressed Gas	44

Card 2/6

## Transactions of the Session (Cont.)

SOV/4012

Nemets, O.F., and M.V. Pasechnik. Neutron Spectrometer in the 0.7 to 3-Mev Energy Band	84
Barchuk, I.F., V.P. Vertebnyy, B.D. Konstantinov, O.F. Nemets, and M.V. Pasechnik. Spectra of Fast Neutrons Scattered by Atomic Nuclei	94
Batalin, V.A., N.S. Kopytin, G.S. Kryshtab, M.V. Pasechnik, and V. I. Strizhak, Nonelastic Scattering Cross Sections of Fast Neutrons	102
Akhiyezer, A.I., N.I. Akhiyezer, and G. Ya. Lyubarskiy. Effective Boundary Condition for Multiplying and Moderating Media Interface	107

## SECTION III. APPLICATIONS OF TAGGED ATOMS IN PHYSICS RESEARCH

Aleksandrov, B.N., B.I. Verkin, and B.G. Lazarev. Obtaining Pure Metals by Repeated Zonal Recrystallization and the Use of Radioactive Isotopes for Investigating the Mechanism of Refining Metal Impurities by This Method	119
--	-----

Card 4/6